







Acuro



TRILUX
NEW LIGHT.

Acuro

Wall-mounted mirror luminaires with high protection rating







 IP20/IP44 0.2 Joule 650 °C



Application

Wall-mounted mirror luminaire with IP44 protection complying to DIN VDE 0100-701: 2008-10 for use in zone 2 within rooms with bath or shower. Wall luminaire for showrooms, corridors, waiting zones.

Optical system

PMMA diffuser, opal. Finely structured surface.

Luminaire body

Aluminium, extruded, powder-coated. Length-optimised for tile and mirror dimensions. Colour white. With integral cable channel on rear for cable routing with offset wall outlets. With white, plastic end caps. Side cable entry is in end cap. Protection rating IP44. Versions ...St... and ...St-S..., protection rating IP20.


Equipment

...S... with push button.
 ...St... with safety socket 230 V, 16 A.
 ...St-S... with push button and 230 V, 16 A safety socket.

...01 with white finish.
 ...04 with chrome finish and chromed plastic end caps.


Electrical version

...E With electronic ballast.
 ...EDD With digitally dimmable electronic ballast.




Acuro 114...
 UTE: 0.52 H + 0.26 T
 DIN 5040: B21
 CIBSE: BZ 6
 NBN L 14-002: BZ 7


Acuro 114...

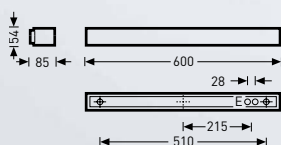

Acuro 128...

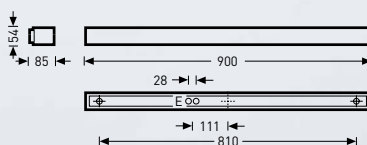


Acuro 139...

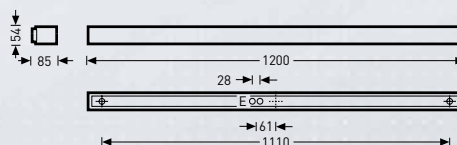




Designation	TOC	Electrical version		Lamps	~kg
		...E...	...EDD	W	
Acuro 114...01	60 371...	...04		1 x 14	1.2
Acuro 114...01 PC	60 372...	...04		1 x 14	1.2
Acuro 128...01	60 373...	...04	...07	1 x 28	2.2
Acuro 139...01	60 374...	...04	...07	1 x 39	1.7
Luminaires with integral push button					
Acuro S 114...01	60 379...	...04		1 x 14	1.3
Acuro S 114...01 PC	60 380...	...04		1 x 14	1.3
Acuro S 114...04	60 385...	...04		1 x 14	1.3
Acuro S 114...04 PC	60 386...	...04		1 x 14	1.3
Luminaires with integral safety socket					
Acuro St 114...01	60 375...	...04		1 x 14	2.3
Acuro St 114...01 PC	60 377...	...04		1 x 14	2.3
Acuro St 114...04	60 381...	...04		1 x 14	2.3
Acuro St 114...04 PC	60 383...	...04		1 x 14	2.3
Luminaires with integral push button and safety socket					
Acuro St-S 114...01	60 376...	...04		1 x 14	2.5
Acuro St-S 114...01 PC	60 378...	...04		1 x 14	2.5
Acuro St-S 114...04	60 382...	...04		1 x 14	2.5
Acuro St-S 114...04 PC	60 384...	...04		1 x 14	2.5
Accessories					
Acuro ZKS 04	60 494 00	Chromed end caps for clipping to diffuser, set of 2.			


Acuro S 114...01

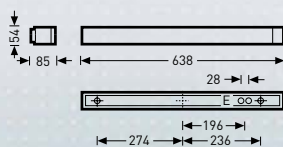


Acuro S 114...04

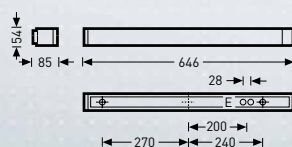

Acuro St(-S) 114...01

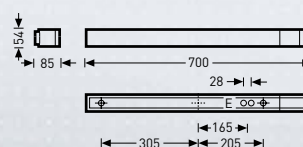

Acuro St(-S) 114...04

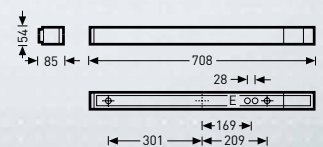

Contacts

TRILUX GmbH & Co. KG

Heidestraße · D-59759 Arnsberg
Postfach 19 60 · D-59753 Arnsberg
Tel. +49 (0) 29 32.3 01-0
Fax +49 (0) 29 32.3 01-3 75
sales@trilux.com · www.trilux.com

PROLJUS AB

Kyrkogatan 18
570 03 VRIGSTAD
Tel. +46 (0) 70 601 05 63
info@proljus.se - www.proljus.se

