


Amatris




TRILUX
NEW LIGHT.

Amatris

Compact LED downlight

CE  IP20 0.5 Joule 850 °C From below IP44

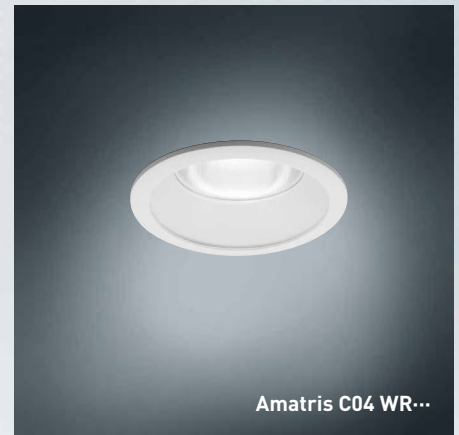

Amatris C04 WR...


Designation	TOC	Electrical version		Lamps/ Luminaire luminous flux/ Light colour	Recess opening/ Recess depth mm	Connected load W	~kg
		...ET...	...ETDD				
Amatris C04 WR LED 1400 nw...01	60 470...	...40	...51	LED/1400 lm/nw	Ø 120 x 100	25	0.9
Amatris C04 WR LED 1400 ww...01	60 471...	...40	...51	LED/1400 lm/ww	Ø 120 x 100	25	0.9

Application

Innovative lighting of sales areas, foyers, corridors, conference rooms, hotels, restaurants and residential areas.

Optical system

Prismatic glass diffuser with white reflector. Narrow wide distribution for all areas without VDU workstations.



Amatris C04 WR...
UTE: 1.00 B + 0.00 T
DIN 5040: A60
CIBSE: BZ 1
NBN L 14-002: BZ 1

LED system

Luminaire luminous flux 1400 lm.
...nw... Neutral white light colour,
Colour temperature 4000 K.
...ww... Warm white light colour,
Colour temperature 3000 K.


Luminaire body

Ceiling ring and heat sink of die-cast aluminium. Including decorative ring for accommodating attachments. Tool-free ceiling installation via rapid-mounting springs. Ceiling cut-out dimensions: Ø 120 mm. Recess depth: 100 mm.

Electrical version

With electronic transformer
...ET... (switchable),
...ETDD... (dali dimmable).
Separate ballast with integral cable strain relief system.

Amatris C04 WR...

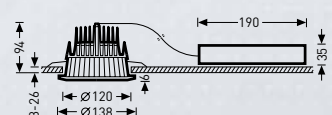

Amatris Decorative elements



Frosted cover with inner convex form
Polycarbonate.



Frosted decorative ring, conical
Polycarbonate.



Frosted decorative ring
Polycarbonate.

Designation	TOC	~kg
Amatris C04 AI-PC	60 472 00	0.1

Designation	TOC	~kg
Amatris C04 RK-PC	60 473 00	0.1

Designation	TOC	~kg
Amatris C04 DR-PC	60 474 00	0.1

Contacts

TRILUX GmbH & Co. KG

Heidestraße · D-59759 Arnsberg
Postfach 19 60 · D-59753 Arnsberg
Tel. +49 (0) 29 32.3 01-0
Fax +49 (0) 29 32.3 01-3 75
sales@trilux.com · www.trilux.com

PROLJUS AB

Kyrkogatan 18
570 03 VRIGSTAD
Tel. +46 (0) 70 601 05 63
info@proljus.se - www.proljus.se

