

Selora



TRILUX
NEW LIGHT.

Selora

Selora S... free-standing luminaire with CDP fine prismatics



IP20 0.2 Joule 850 °C



Application

For attractive lighting of offices, sales areas, exhibition spaces, banks, and especially for workstations with computer screens.

Optical system

With fine-prism structures for all-round glare reduction. Partly reflective inner coating. For VDU workstations according to EN 12464-1 due to low luminance $L \leq 1000 \text{ cd/m}^2$ at critical angles above 65° in all planes.

Luminaire body

Direct/indirect distribution free-standing luminaire. Consisting of luminaire head, stand profile and base. Colour silver-grey, similar to RAL 9006. Luminaire of folded sheet aluminium. Support column of rectangular aluminium profile. Rectangular base, flat.

Electrical connection

With flexible cable, approx. 3 m, and safety plug.


Electrical version

...E With electronic ballast.

...EDS With dimmable electronic ballast and sensor for constant light control and presence detection. Additionally with multifunctional push button for On/Off, dimming and light control.




Selora S...



Selora S CDP...
UTE: 0.19 B + 0.50 T
DIN 5040: D 53
CIBSE: BZ 1
NBN L 14-002: BZ 2

Designation	TOC	Electrical version		Lamps W	~kg
		...E...	...EDS		
Selora S CDP 4TCL55... Luminaire supplied with country-specific safety plug.	60 487...	...04	...08	4 x TC-L 55	18.0

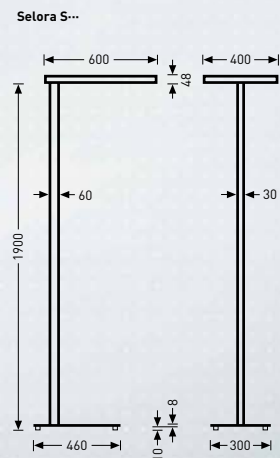

Contacts

TRILUX GmbH & Co. KG

Heidestraße · D-59759 Arnsberg
Postfach 19 60 · D-59753 Arnsberg
Tel. +49 (0) 29 32.3 01-0
Fax +49 (0) 29 32.3 01-3 75
sales@trilux.com · www.trilux.com

PROLJUS AB

Kyrkogatan 18
570 03 VRIGSTAD
Tel. +46 (0) 70 601 05 63
info@proljus.se - www.proljus.se

